



With a thickness gauge in one hand and your ultrasonic transducer in the other, did you ever wish you had an extra hand?

Introducing the **StressTel PocketMIKE™** general purpose thickness gauge. The **PocketMIKE™** 's integrated product design combines the instrument and transducer into a single package not much larger than a traditional cabled probe allowing for true single hand operation.

The **PocketMIKE™** thickness gauge is packaged in a machined stainless steel housing environmentally sealed to IP67.

Four button operation and Automatic On-Block Probe Zero further support StressTel's goal of providing very capable yet simple to use instruments.

The high contrast backlit display can be mechanically and electronically rotated for ease of reading in any orientation.

Single hand operation
Waterproof to IP67/IEAC529

It's That Simple!

PocketMIKE™ SPECIFICATIONS

Kit Includes

- Instrument
- Wrist Lanyard
- One 1.5V AA Alkaline Battery
- Hard Shell Carry Case
- Integrated Transducer
- Couplant
- Operating Manual
- Certificate of Calibration



- 1 Power Key
- 2 Increase value within CAL or SETUP
- 3 Decrease value within CAL or SETUP
- 4 SETUP key to change operating modes
- 5 Initiates CAL function
- 6 Backlight Status indicator
- 7 Coupling indicator
- 8 Thickness Mode indicator
- 9 Velocity Mode indicator
- 10 CAL Mode indicator
- 11 Metric or Imperial Units
- 12 Battery Control

Special Features

- Integrated Transducer, 5 MHz
- True Single Hand Operation
- Machined Stainless Steel Housing
- Environmentally Sealed to IP67/IEC529
- Automatic On-Block Probe Zero
- Automatic Timed Shutoff
- Auto Backlight Mode
- Known Thickness Calibration
- Known Velocity Calibration
- 4 Button Sealed Membrane Keypad
- User Selectable Measurement Units
- Exchangeable Probes

Physical Size

- 100 mm High (4 inches)
- 35 mm Nominal Diameter (1.38 inches)
- 12 mm (0.5 inch) Probe Diameter

Weight

200 grams with Battery

Power Source

One 1.5V AA Alkaline Battery

Measuring Range*

1.0 mm to 250 mm
(0.040 inches to 9.999 inches)

Displayed Resolution

0,01 up to 99,99 mm, 0,1 above
(0.001 up to 9.999 inches, 0.01 above)

Operating Temperature



-10° C to +50° C
(14° F to 122° F)

Probe Surface Temperature

-10° C to +100° C
(14° F to 212° F)



* Material and application dependent
Specifications subject to change without notice

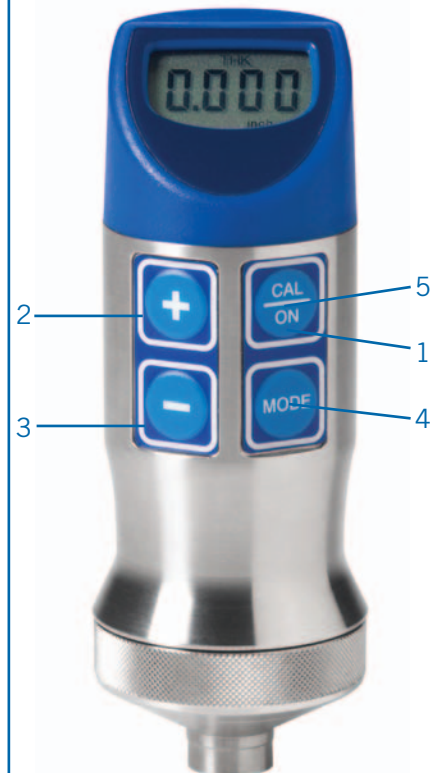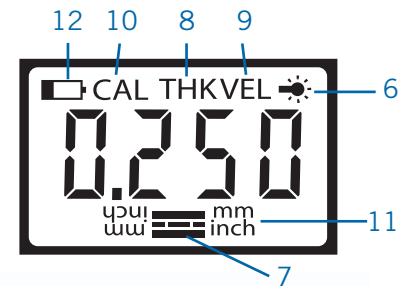

GEInspectionTechnologies.com

GE Inspection Technologies, LP
50 Industrial Park Road
Lewistown, PA, USA 17044
phone +1-717 242-0327
fax +1-717 242-2606

GE Inspection Technologies GmbH
Robert-Bosch-Straße 3
D-50354 Hürth, Germany
phone +49 2233-601-0
fax +49 2233-601-402

STRESSTEL
part of GE Inspection Technologies